

# DH-ARD1111C

## Ceiling PIR Detector




### Features

- 8-bit low-power CMOS processor
- 360 degree angle, 6M detecting range
- Ceiling mounted at 3.6M
- Temperature auto-compensation, avoiding false alarm
- Three digital pulses optional for different alarm time delay (5/10/30s )
- RFI protection: 20 to 1000 MHz(e.g. Mobile communication)
- LED on/off optional


### Technical Specification

Detection Range/Angle	6m/360°
Microwave Frequency	-
Mounting Type	Ceiling mount
Installation Height	2.5-6m
Pet Immunity	-
Relay Output	N.C.
Tamper Switch	N.C.
White Light Immunity	6500LUX
Dimension	116mmx28.2mm
Working Voltage	DC9-16V
Operation Current	<20mA
Working Temperature	-10°C~+50°C
Material	ABS plastic


### General View

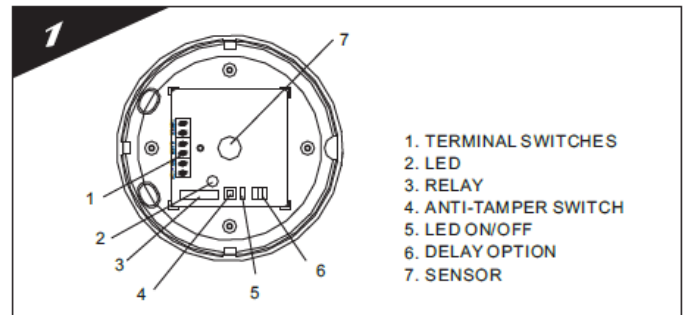

### Terminal Block

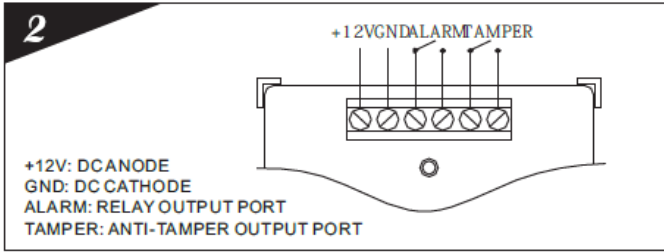

### Digital Pulse Option

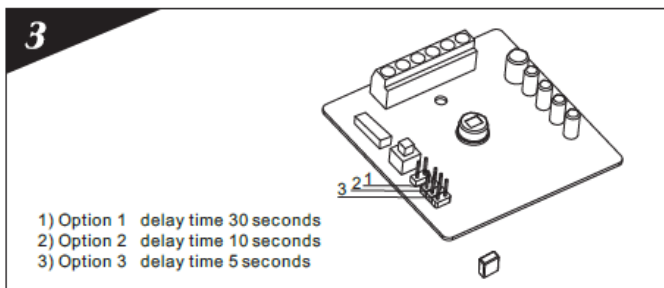

### Range of Detection

